

REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE








**ELECTRICAL**

CURRENT: 0.5A MAX.  
 DIELECTRIC WITHSTANDING VOLTAGE: 250V AC MIN.  
 CONTACT RESISTANCE: 30mΩ MAX.  
 INSULATION RESISTANCE: 100MΩ MIN.

**ENVIRONMENTAL**  
 TEMPERATURE: -25°C TO +85°C  
 WITH "A", "B", "C", "D" °C MAJOR DIMENSION FOR QC.

**DIMENSIONAL INFORMATION**

PIN	Dimension				PIN	Dimension				PIN	Dimension			
	A	B	C	D		A	B	C	D		A	B	C	D
3	8.1	2.1	1.0	6.10	23	18.1	12.1	11.0	16.10	43	28.1	22.1	21.0	26.10
4	8.6	2.6	1.5	6.60	24	18.6	12.6	11.5	16.60	44	28.6	22.6	21.5	26.60
5	9.1	3.1	2.0	7.10	25	19.1	13.1	12.0	17.10	45	29.1	23.1	22.0	27.10
6	9.6	3.6	2.5	7.60	26	19.6	13.6	12.5	17.60	46	29.6	23.6	22.5	27.60
7	10.1	4.1	3.0	8.10	27	20.1	14.1	13.0	18.10	47	30.1	24.1	23.0	28.10
8	10.6	4.6	3.5	8.60	28	20.6	14.6	13.5	18.60	48	30.6	24.6	23.5	28.60
9	11.1	5.1	4.0	9.10	29	21.1	15.1	14.0	19.10	49	31.1	25.1	24.0	29.10
10	11.6	5.6	4.5	9.60	30	21.6	15.6	14.5	19.60	50	31.6	25.6	24.5	29.60
11	12.1	6.1	5.0	10.10	31	22.1	16.1	15.0	20.10	51	32.1	26.1	25.0	30.10
12	12.6	6.6	5.5	10.60	32	22.6	16.6	15.5	20.60	52	32.6	26.6	25.5	30.60
13	13.1	7.1	6.0	11.10	33	23.1	17.1	16.0	21.10	53	33.1	27.1	26.0	31.10
14	13.6	7.6	6.5	11.60	34	23.6	17.6	16.5	21.60	54	33.6	27.6	26.5	31.60
15	14.1	8.1	7.0	12.10	35	24.1	18.1	17.0	22.10	55	34.1	28.1	27.0	32.10
16	14.6	8.6	7.5	12.60	36	24.6	18.6	17.5	22.60	56	34.6	28.6	27.5	32.60
17	15.1	9.1	8.0	13.10	37	25.1	19.1	18.0	23.10	57	35.1	29.1	28.0	33.10
18	15.6	9.6	8.5	13.60	38	25.6	19.6	18.5	23.60	58	35.6	29.6	28.5	33.60
19	16.1	10.1	9.0	14.10	39	26.1	20.1	19.0	24.10	59	36.1	30.1	29.0	34.10
20	16.6	10.6	9.5	14.60	40	26.6	20.6	19.5	24.60	60	36.6	30.6	29.5	34.60
21	17.1	11.1	10.0	15.10	41	27.1	21.1	20.0	25.10	61	37.1	31.1	30.0	35.10
22	17.6	11.6	10.5	15.60	42	27.6	21.6	20.5	25.60	62	37.6	31.6	30.5	35.60

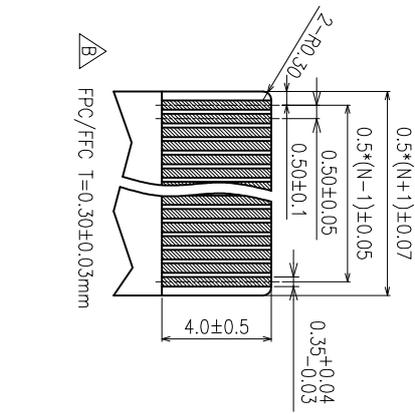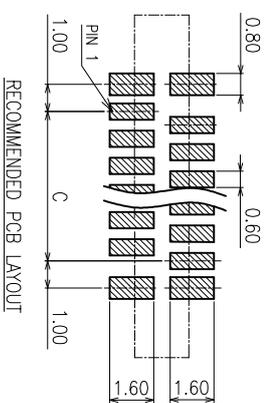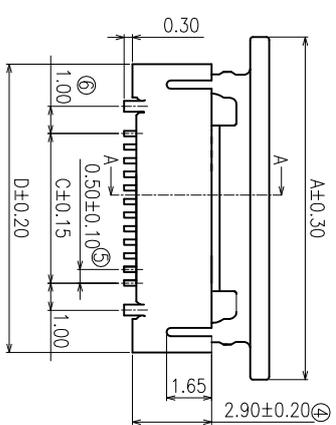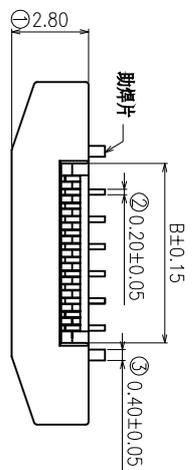

D	HOLDDOWN	2	BRASS	
C	ACTUATOR	1	HIGH-TEMP. THERMOPLASTIC UL 94V-0	
B	CONTACT	3-61	PHOSPHOR BRONZE	TIN OR GOLD PLATED OVER NICKEL
A	HOUSING	1	THERMOPLASTIC UL 94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X	:±0.30			
XX	:±0.20			
XXX	:±0.15			
XXXX	:±0.08			
TITLE: 3G ENTERPRISE LIMITED				
FPC 0.5 PITCH 單面接觸立式 正翻位SWT180度				
DWN	JACK	PART NO: ZFP-0361-0	□ □	
CHKD	SCALE:	UNIT: mm	☉	
APVD	SIZE: A3	SHEET: 10F 1	REV: A	
CUSTOMER COPY				