


REV/	ECN NO OR DESCRIPTION	REVISED	DATE
------	-----------------------	---------	------

Dimensions List


PIN	DIP		PIN	DIP	
	A	B		A	B
2*01	2.54	0.00	2*21	53.34	50.80
2*02	5.08	2.54	2*22	55.88	53.34
2*03	7.62	5.08	2*23	58.42	55.88
2*04	10.16	7.62	2*24	60.96	58.42
2*05	12.70	10.16	2*25	63.50	60.96
2*06	15.24	12.70	2*26	66.04	63.50
2*07	17.78	15.24	2*27	68.58	66.04
2*08	20.32	17.78	2*28	71.12	68.58
2*09	22.86	20.32	2*29	73.66	71.12
2*10	25.40	22.86	2*30	76.20	73.66
2*11	27.94	25.40	2*31	78.74	76.20
2*12	30.48	27.94	2*32	81.28	78.74
2*13	33.02	30.48	2*33	83.82	81.28
2*14	35.56	33.02	2*34	86.36	83.82
2*15	38.10	35.56	2*35	88.90	86.36
2*16	40.64	38.10	2*36	91.44	88.90
2*17	43.18	40.64	2*37	93.98	91.44
2*18	45.72	43.18	2*38	96.52	93.98
2*19	48.26	45.72	2*39	99.06	96.52
2*20	50.80	48.26	2*40	101.6	99.06

技术要求:

- 1, 额定电流: 3A
 - 2, 额定电压: 500V 绝缘电阻: 1000MΩ MIN.at DC500V
 - 3, 适用温度: -40° C to +105° C.
 - 4, 焊锡温度: 260° C (3-5秒)
 - 5, 塑件表面平整、光洁、无毛刺、气泡, 针表面无氧化、电镀不良等
 - 6, 本产品符合ROHS环保要求
 - 7, 未注公差为±0.20
 - 8, PART NO: 2PH-7502-0口口
- PIN脚排数1-40

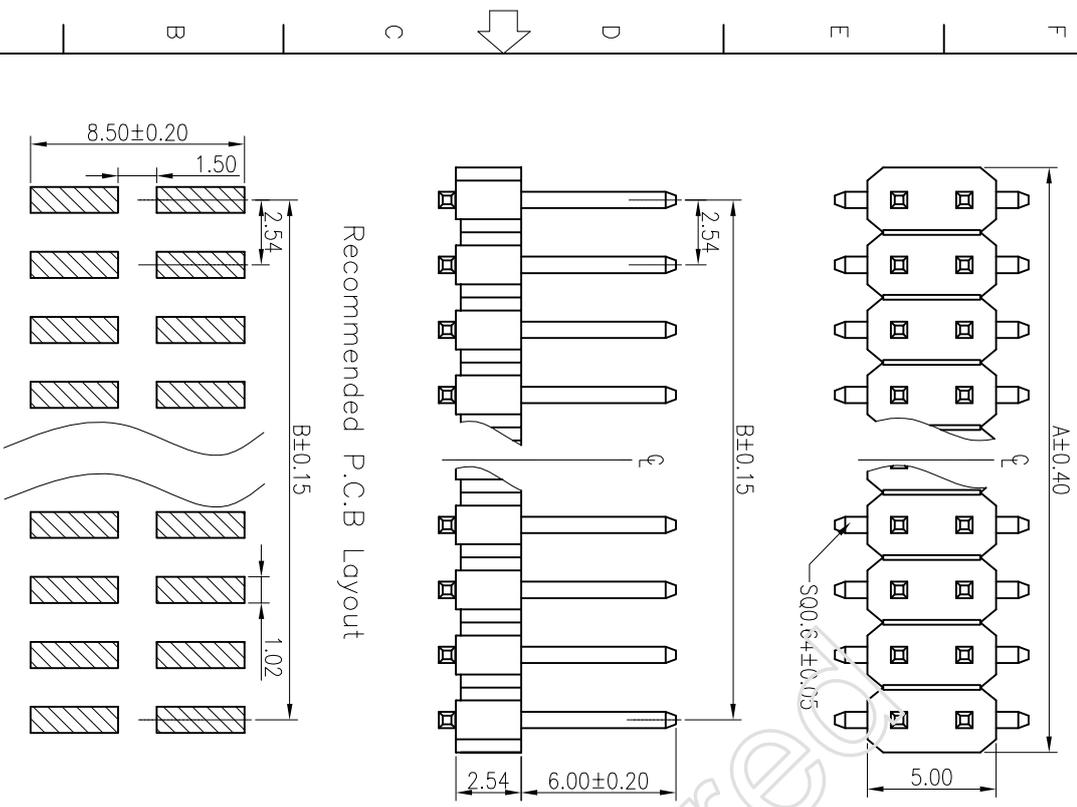

Recommended P.C.B Layout

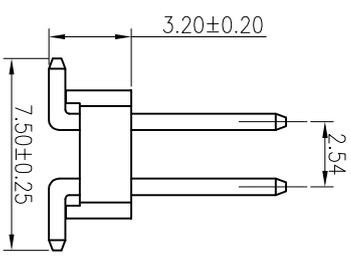

B	CONTACT	2-80	BRASS	GOLD FLASH
A	HOUSINGS	1	BLACK	
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
3G ENTERPRISE LIMITED				
TITLE PH2.54 SMT=7.5 PA6.0 PB3.2				
DWV	JACK	PART NO.	2PH-7502-0口口	
CHKD		SCALE:N/A	UNIT: mm	
APVD		SIZE: A3	SHEET: 1 OF 1	REV: A
CUSTOMER COPY(YB)				

DECIMALS: ANGLES:
X :±0.38 X :±5°
X.X :±0.25
X.XX :±0.20
X.XX :±0.10