



Pin Assignments

PIN	Name
C1	Vcc
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	Vpp
C7	I/O
C8	Reserved

Recommended PCB Layout  
Tolerance: ±0.05



- NOTE:
- Material & Finish See Table;
  - Circuit Diagram For Switch
  - Characteristic:
    - 3-1 Current Rating :1A max.
    - 3-2 Contact Resistance:100mOhms max
    - 3-3 Insulation Resistance:100MOhms min./500VDC
    - 3-4 Dielectric Withstanding Voltage:500VAC/1minute
    - 3-6 Durability: 2000 Cycles
    - 3-7 Operating Temperature:-25°C to+85°C
  - Please Contact PROMAX Sales Representative to Verify Product Details.

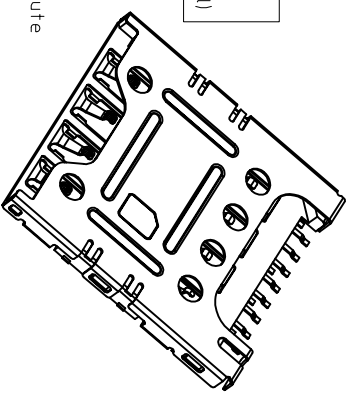

4	Shell	Stainless Steel	Nickel Under Plated Overall g/f plated on solder tails
3	Housing	Thermoplastics	Black, UL94V-0
2	Detect	Copper Alloy	Gold Flash on Solder Tails and Contact Area.
1	Terminal	Copper Alloy	Nickel Under Plated Overall.
Item	Part Name	Material	Description

GENERAL TOLERANCE		DWG NO.	JYSA0422-001	APPD:	WIND	Scale	1:1
X.±0.45	X.±15'	Title	MICRO SIM H1.24mm CONNECTOR	CHKD:		UNIT	mm
X±0.35	X±2'	Part NO.	JYS-SIM124-139	DR:			
.XX±0.25	.xx±1'	Date	2015/03/29				
.XXX±0.15	.xxx±0.5'						
SHEET	1/1						

**JYS** 杰宇森电子有限公司  
JIE YU SEN ELECTRONIC CO., LTD.