


TABLE:

P/N	TYPE
JYS-USB770-002A	WITHOUT POST
JYS-USB770-003	WITH POST

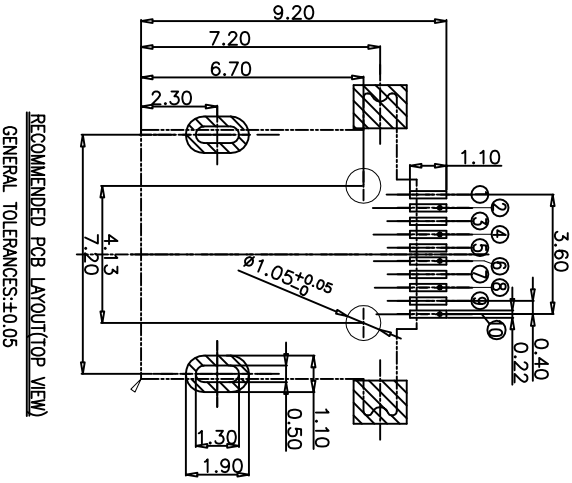

- NOTE:
- ELECTRICAL CHARACTERISTICS
    - 1-1. CONTACT RESISTANCE: 80 milliohms MAX.
    - 1-2. INSULATION RESISTANCE: 1,000 Megohms MIN.
    - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN FOR 1 MINUTE.
  - MECHANICAL CHARACTERISTICS
    - 2-1. RETENTION FORCE:MIN.100gf/PIN
    - 3. PLATING: 2~3U"AU MIN PLATED
    - 4. MATERIAL:SPCC-SB

GENERAL TOLERANCE	DWG NO.	JYSAO709-001	APPD:	WIND	Scale	1:1
X±0.45	X:±5'		CHKD:		UNIT	mm
X±0.35	X:±2'		DR:			
XX±0.25	.XX'±1'	Part NO.	Date	2011/10/31		
.XXX±0.15	.xxx'±0.5'					
SHEET 1/1						

MINI USB TOP AB型母座  
前插后贴  
SEE TABLE

JYS 杰宇森电子有限公司  
JIE YU SEN ELECTRONIC CO., LTD.

REV.	EGN.NO.	MODIFY CONTENT	DATE
A		NEW	2011/10/31