
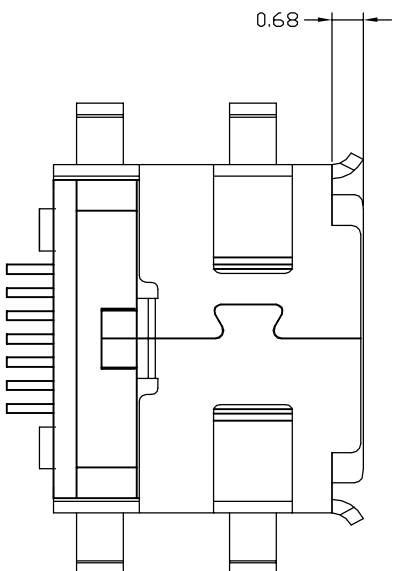


RECOMMENDED PCA LAYOUT

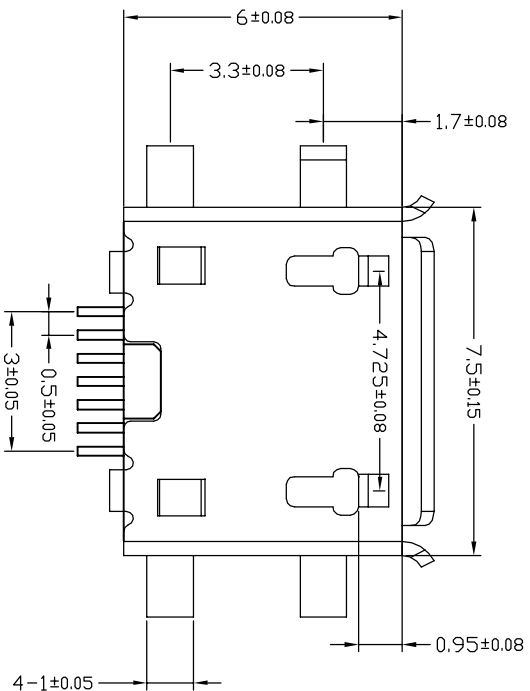

NOTES:

MATERIAL:

- 1. 1 HOUSING: HIGH TEMPERATURE THERMOPLASTIC WITH G. F. UL94V-0
- 1. 2 CONTACT: COPPER ALLOY T=0.12mm
- 1. 3 SHELL: SUS304, T=0.30 mm
- 2. SPECIFICATION:
  - 2. 1 CURRENT RATING: 1 A MAX
  - 2. 2 DIELECTRIC WITHSTANDING VOLTAGE: 100 V(ac) FOR 1min
  - 2. 3 CONTACT RESISTANCE: 30 m
  - 2. 4 INSULATION RESISTANCE: 100 M
  - 2. 5 TOTAL MATING FORCE: 3.57 kgf MAX.
  - 2. 6 TOTAL UNMATING FORCE: 1.0kgf MIN. 0.81~2.05 kgf MIN. AFTER 10000
  - 2. 7 TEMPERATURE RANGE: -30° C~+80° C

GENERAL TOLERANCE		DWG NO.	APPD.	WMD	Scale
X±0.45	X:±5°	JYSA0413-02			1:1
X±0.35	X:±2°				mm
XX±0.25	.XX±1°				
.XXX±0.15	.xxx±0.5°				
SHEET 1/1					
MICRO USB 7P 连接器 0.8mm 四脚插板					
JYS-USB080-028		Date	2012/04/13		
杰宇森 电子有限公司 JIE YU SEN ELECTRONIC CO., LTD.					

REV.	EGN.NO.	MODIFY/CONTENT	DATE
A		NEW	2012/04/13