

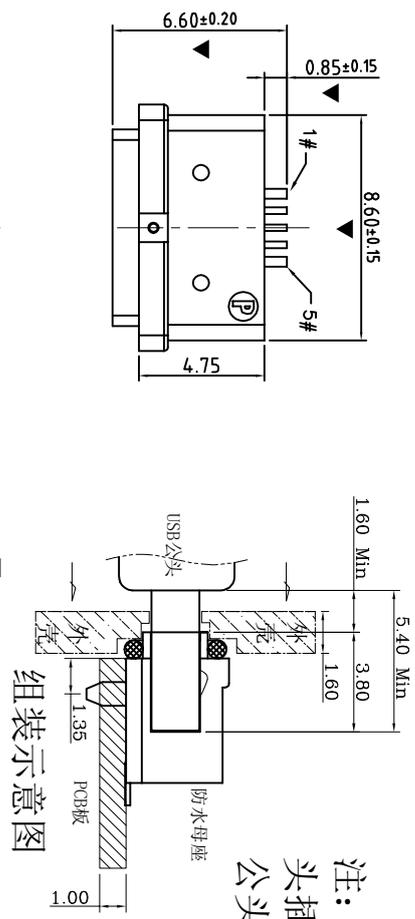


REV.	ECH.NO.	MODIFY CONTENT	DATE
A		NEW	2019/04/13

注：设计时，请注意公头插入时的距离，防止公头插不到底。

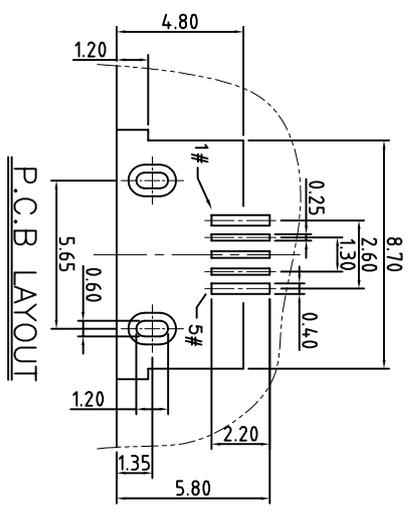


组装示意图

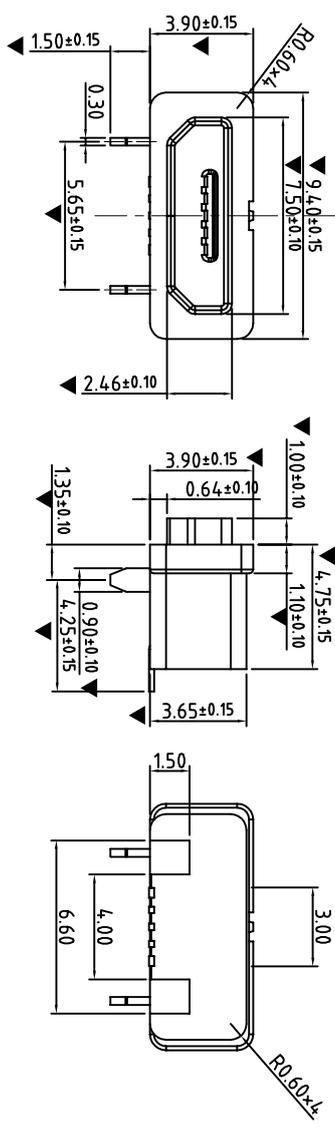

- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - RATING: 3A(PIN1&5), 0.5A(PIN2&3&4);
 - CONTACT RESISTANCE: 30 mΩ MAX.(INITIAL);
 - DIELECTRIC WITHSTANDING: 500V AC MIN.;
 - INSULATION RESISTANCE: 1000MΩ MIN.;
 - DURABILITY: 5,000 CYCLES MIN.;
 - INSERTION FORCE: 3.5Kgf (35N) Max.;
 - EXTRACTION FORCE: 0.8Kgf (8N) Min.;
 - WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX6.
 - PLUG INTERFACE DIMENSIONS CONFORM TO USB2.0 SPEC.
 - PACKAGING: TAPE & REEL.

Contact Number	Signal Name	Remarks
1#	VBUS	Power
2#	D-	Date-
3#	D+	Date+
4#	ID	Reserve or Ground
5#	GND	Ground

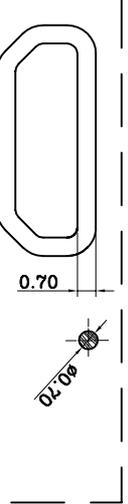

注：防水圈是圆形截面，直径为0.7mm的硅胶圈
防水圈挤压力：由0.7mm挤压到0.3mm ~ 0.4mm，防水效果好

ITEM	PART NAME	Q'TY	FINISH	NOTE
3	Shell	1	SUS304R-1/2H Ni Plating T=0.30mm	
2	Contact	5	Phosphor bronze C5191R-EH Au/Ni Plating T=0.20mm	
1	Housing	1	PA9T&ICP (G.F30%)	

GENERAL TOLERANCE		DWG NO.	JYSA0413-02	APPD:	WIND	Scale	1:1
X±0.45	x:±5'	Title	Micro USB 5Pin SMT (B) Type (标准规格)	CHKD:		UNIT	mm
X±0.35	x:±2'	Part NO.	JYS-USB565-058	DR:			
.XX±0.25	.xx'±1'			Date	2019/04/13		
.XXX±0.15	.xxx'±0.5'						