

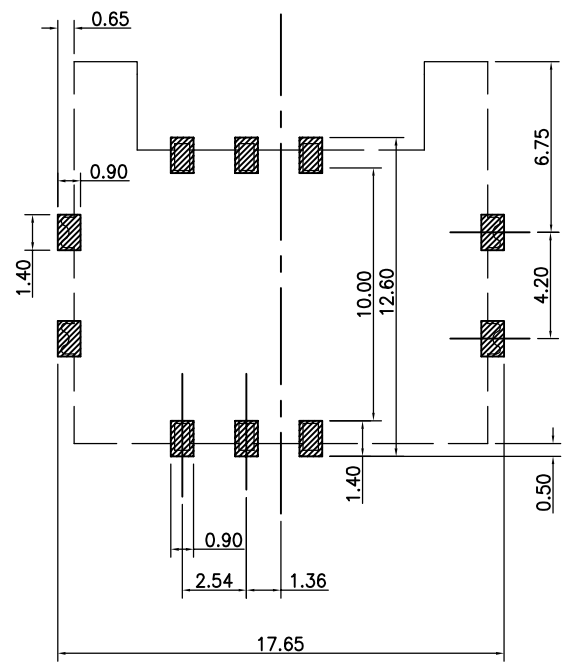


REV.	ECN.NO.	MODIFY.CONTENT	DATE
A		NEW	2011/10/31

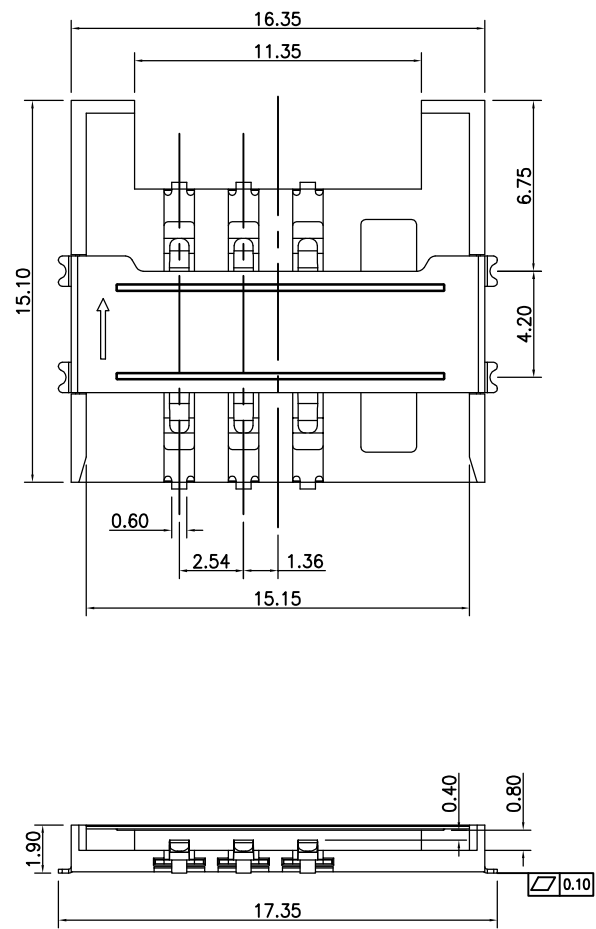

RECOMMEND PCB LAYOUT
TOLERANCE: ± 0.05 (TOP VIEW)

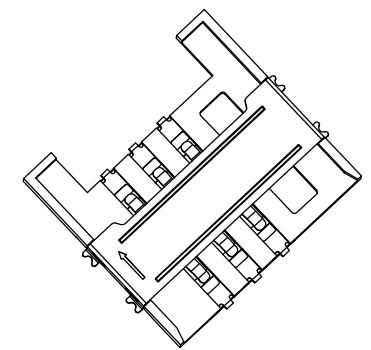

NOTES:

1. Material:
 - Housing: High Temperature Thermoplastic LCP UL94V-0 Black
 - Contacts: Copper Alloy C5191 $T=0.15 \pm 0.02$ mm
 - Shell: Stainless steel SUS201T $=0.15 \pm 0.02$ mm
2. Finish:
 - Contacts: Gold Flash Plated on Contact Area
 - 100u"Min Sn Plated on Solder Area Both 50u"Min Ni Underplated Overall
 - Shell: Gold Flash Plated on Solder Area
3. SPECIFICATIONS:
 - Voltage Rating: 30Vrms
 - Current Rating: 1.0A
 - Contact Resistance: 30mΩ Max
 - Insulation Resistance: 500MΩ Min
 - Dielectric Withstanding Voltage: 200VAC/1minute
 - Temperature: -40°C to +85°C
 - Durability: 5000 Cycles

GENERAL TOLERANCE		DWG NO.	JYSA0909-001	APPD:	WIND	Scale	1:1
X.±0.45	x.'±5'	Title	2.0H 6PIN SIM CARD 连桥 外焊式	CHKD:		UNIT	mm
.X±0.35	.x'±2'			DR:			
.XX±0.25	.xx'±1'	Part NO.	JYS-SIM200-013A	Date	2011/10/31		
.XXX±0.15	.xxx'±0.5'						
SHEET	1/1			 JYSCONN Electronics Co., LTD.			