

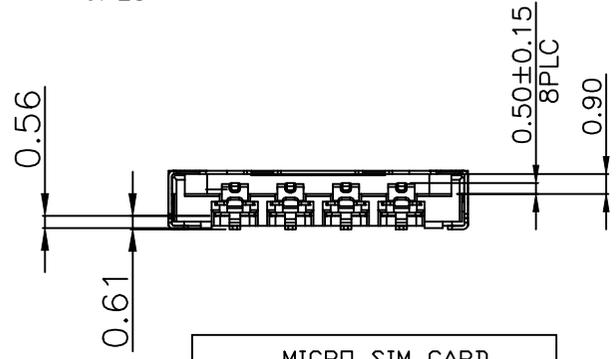
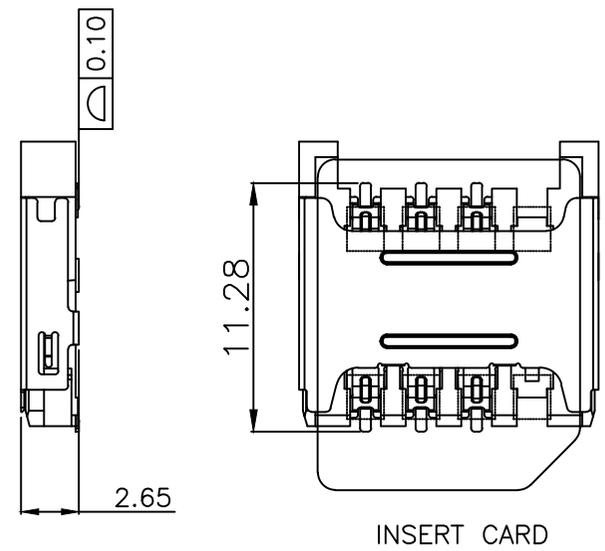
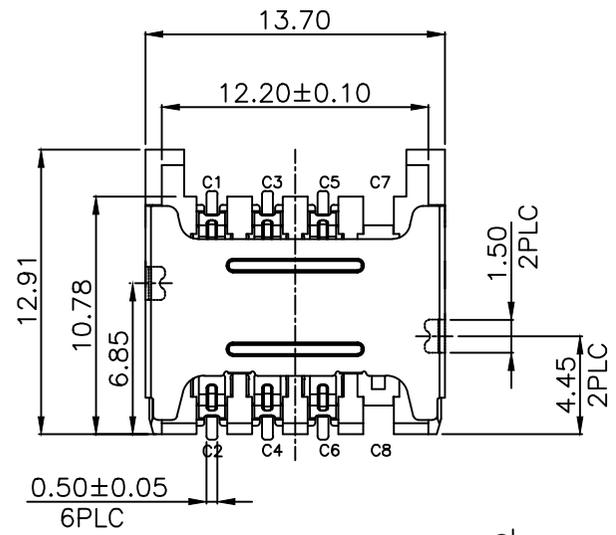


| REV. | ECN.NO. | MODIFY.CONTENT | DATE |
|------|---------|----------------|------------|
| A0 | | NEW | 2016/05/22 |

NOTES:
 1)MATERIAL:
 HOUSING: LCP UL 94V-0
 CONTACT: COPPER ALLOY
 SHELL: STAINLESS STEEL
 2)FINISH :
 CONTACT:GOLD FLASH PLATED ON CONTACT AREA;
 GOLD FLASH PLATING ON SOLDER TAILS,
 WITH ENTIRE CONTACT UNDERPLATED NICKEL
 SHELL: NICKEL UNDERPLATED OVERALL,
 GOLD FLASH PLATED ON SOLDER TAILS

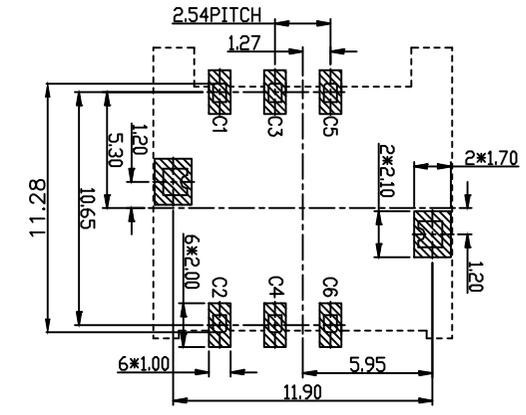

| MICRO SIM CARD | |
|----------------|-------------|
| PIN NO. | DESCRIPTION |
| C1 | VCC |
| C3 | RST |
| C5 | CLK |
| C7 | |
| C2 | GND |
| C4 | VPP |
| C6 | I/O |
| C8 | |

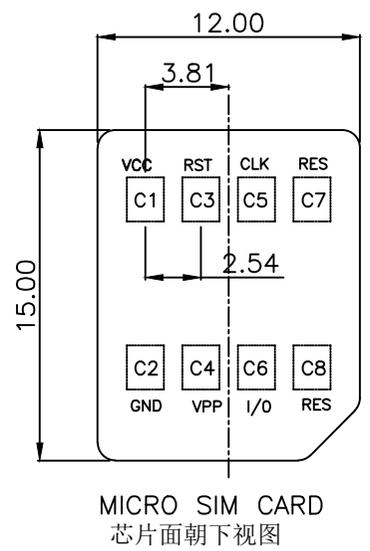

RECOMMENDED PCB LAYOUT(TOP VIEW)
 GENERAL TOLERANCES:±0.05

| | | | | | | | |
|-------------------|------------|--------------|------------------------------------|----|------------|-----|----|
| GENERAL TOLERANCE | 图号 | JYSA20160522 | 设计 | | 比例 | 1:1 | |
| X.±0.45 | x.'±5' | 品名 | MICRO SIM 2.65H 6PIN CARD CONN. | 审核 | 单位 | mm | |
| .X±0.35 | .x'±2' | | | 核准 | | | 视角 |
| .XX±0.25 | .xx'±1' | 料号 | JYS-SIM265-195 | 日期 | 2016/05/22 | 版本 | A1 |
| .XXX±0.15 | .xxx'±0.5' | | | | | | |
| 页数 | 1/2 | | | | | | |

JYSCONN Shenzhen
 JYSCONN Electronics Co., LTD.