
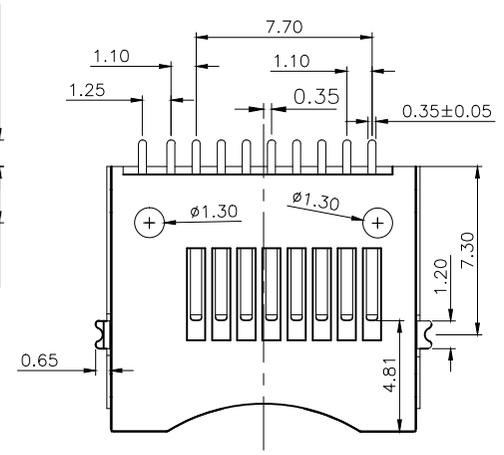



REV.	ECN.NO.	MODIFY.CONTENT	DATE
A		NEW	2012/08/03

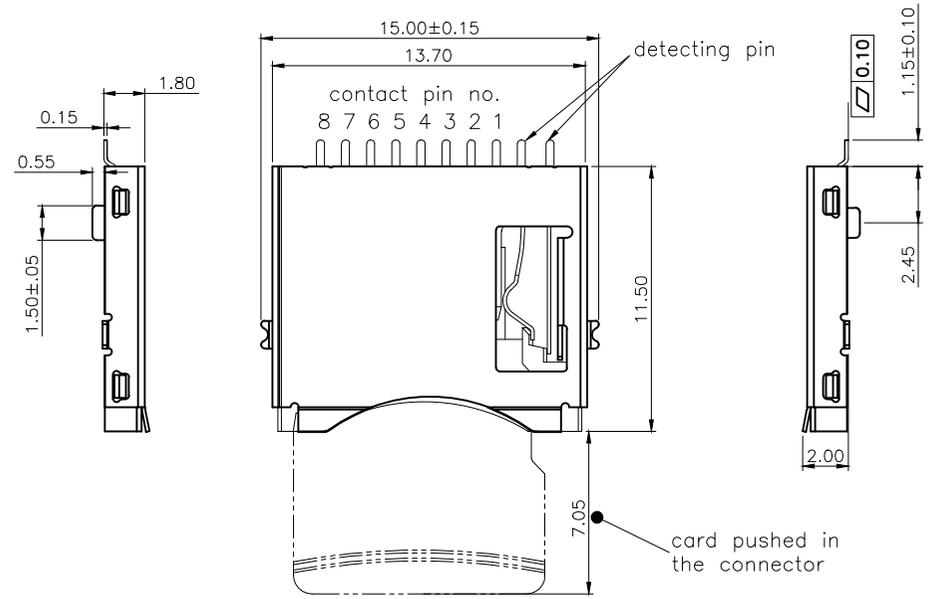



Specification:

- Electrical Characteristics:
 Contact Current Rating: 0.5 Amperes.
 Dielectric Withstanding Voltage: AC500V r.m.s.
 Insulation Resistance: 1000 MΩ Minimum
 Contact Resistance: 40mΩ Maximum
- Environmental:
 Operating Temperature: -20°~+60°
- MAJOR DIM: ▼

WITHOUT CARD, SWITCH OPENED IN THE CONNECTOR;
 WHEN CARD PUSHED-IN, SWITCH WAS CLOSED

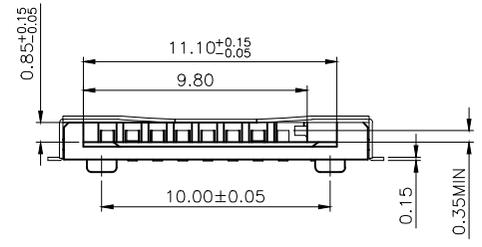

Pin No.	NAME	TYPE
1	DAT 2	I/O/PP
2	CD/DAT 3	I/O/PP
3	CMD	PP
4	VDD	S
5	CLK	I
6	VSS	S
7	DAT0	I/O/PP
8	DAT1	I/O/PP

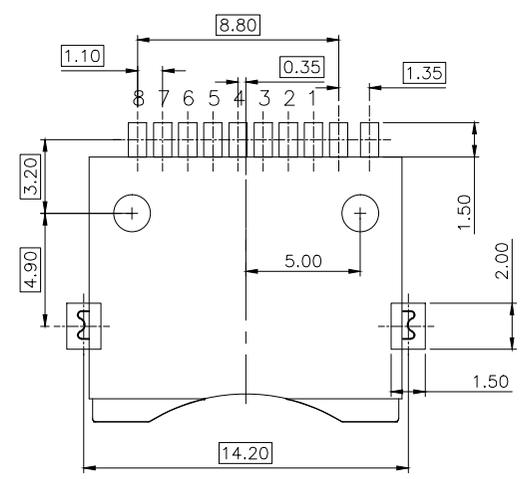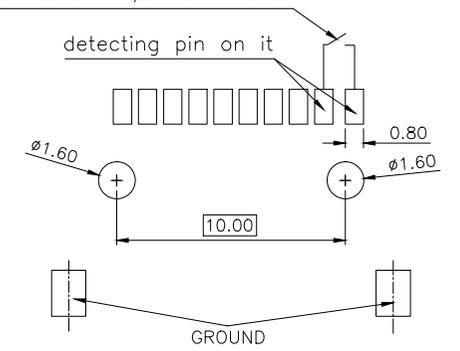

RECOMMENED P.C.B LAYOUT(TOP VIEW)
 GENERAL TOLERANCE ±0.05

GENERAL TOLERANCE		DWG NO.	APPD:	WIND	Scale	1:1
X.±0.45	x.*±5°	Title	TF 简易 10PIN 卡座	CHKD:	UNIT	mm
.X±0.35	.x*±2°		DR:	Date	2012/08/03	
.XX±0.25	.xx*±1°	Part NO.	JYS-TF190-033			
.XXX±0.15	.xxx*±0.5°					
SHEET	1/1					